




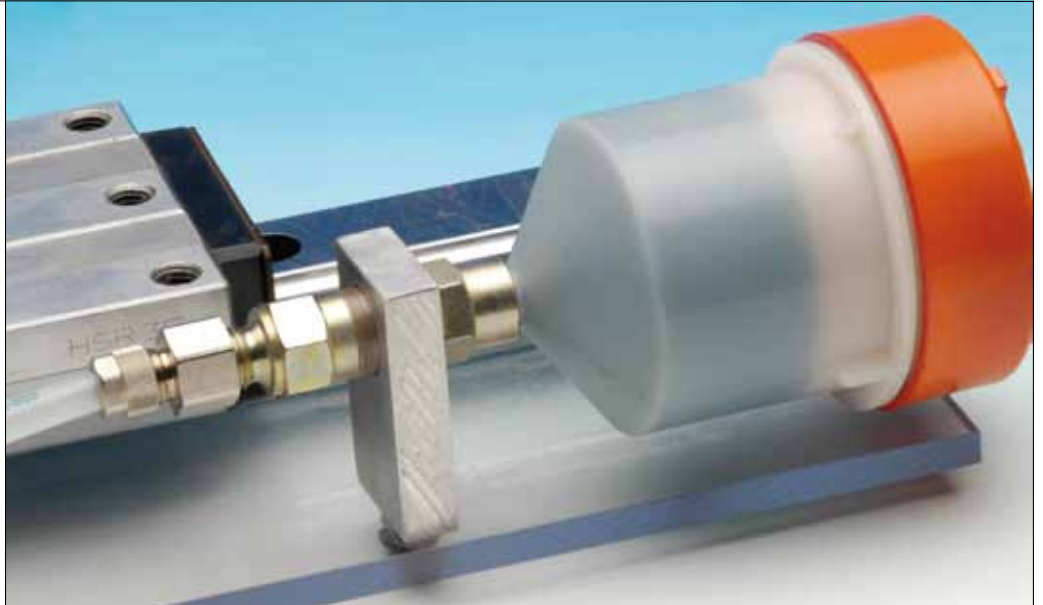


Lubricating lines with a max. bursting pressure of 20 bar.  
Great selection of fittings.

## Fittings

For running fixed and flexible lines between lubricator and lubricating point.

Safe, reliable, adaptable to every space.








|                                                                                     |                                                                                    |                                                                                     |                                                                             |                                  |                 |                       |           |                       |           |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|----------------------------------|-----------------|-----------------------|-----------|-----------------------|-----------|
|    | <b>Male adapter straight</b><br>– cylindrical –<br><b>Nickel-plated</b>            | For hose male/female thread Ø mm                                                    | Male thread mm                                                              | Thread length mm                 | Total length mm | Width across flats mm | Order no. |                       |           |
|                                                                                     |                                                                                    | 6/4                                                                                 | G ¼                                                                         | 6                                | 18.5            | 13                    | 12734     |                       |           |
|                                                                                     |                                                                                    |                                                                                     | G ¼                                                                         | 8                                | 19              | 17                    | 12732     |                       |           |
|                                                                                     |                                                                                    |                                                                                     | G ½                                                                         | 10                               | 19.5            | 24                    | 12733     |                       |           |
|                                                                                     |                                                                                    | 8/6                                                                                 | G ¼                                                                         | 6                                | 18.5            | 13                    | 12502     |                       |           |
|                                                                                     |                                                                                    |                                                                                     | G ¼                                                                         | 8                                | 19              | 17                    | 12500     |                       |           |
|                                                                                     |                                                                                    |                                                                                     | G ½                                                                         | 10                               | 19.5            | 24                    | 12501     |                       |           |
|                                                                                     |                                                                                    | 10/8                                                                                | G ¼                                                                         | 6                                | 20              | 14                    | 14060     |                       |           |
|                                                                                     |                                                                                    |                                                                                     | G ¼                                                                         | 8                                | 20.5            | 17                    | 13811     |                       |           |
| G ½                                                                                 | 10                                                                                 |                                                                                     | 21                                                                          | 24                               | 14061           |                       |           |                       |           |
|  | <b>Male adapter straight</b><br>– conical –<br><b>Nickel-plated</b>                | For hose male/female thread Ø mm                                                    | Male thread mm                                                              | Thread length mm                 | Total length mm | Width across flats mm | Order no. |                       |           |
|                                                                                     |                                                                                    | 6/4                                                                                 | R ¼                                                                         | 7.5                              | 26              | 12                    | 13073     |                       |           |
|                                                                                     |                                                                                    |                                                                                     | R ¼                                                                         | 11                               | 30              | 14                    | 13074     |                       |           |
|                                                                                     |                                                                                    |                                                                                     | R ¾                                                                         | 11.5                             | 31              | 17                    | 14062     |                       |           |
|                                                                                     |                                                                                    | 8/6                                                                                 | R ¼                                                                         | 7.5                              | 26              | 12                    | 13075     |                       |           |
|                                                                                     |                                                                                    |                                                                                     | R ¼                                                                         | 11                               | 30              | 14                    | 13076     |                       |           |
|                                                                                     |                                                                                    |                                                                                     | R ¾                                                                         | 11.5                             | 31              | 17                    | 13077     |                       |           |
|                                                                                     |                                                                                    | 10/8                                                                                | R ¼                                                                         | 7.5                              | 28              | 14                    | 14063     |                       |           |
|                                                                                     |                                                                                    |                                                                                     | R ¼                                                                         | 11                               | 32              | 14                    | 14064     |                       |           |
| R ½                                                                                 | 14                                                                                 |                                                                                     | 35                                                                          | 22                               | 14065           |                       |           |                       |           |
|  | <b>Female bulkhead fitting straight</b><br>– cylindrical –<br><b>Nickel-plated</b> | For hose male/female thread Ø mm                                                    | Female thread mm                                                            | Thread length mm                 | Total length mm | Width across flats mm | Order no. |                       |           |
|                                                                                     |                                                                                    | 6/4                                                                                 | G ¼                                                                         | 8                                | 24              | 13                    | 12729     |                       |           |
|                                                                                     |                                                                                    |                                                                                     | G ¼                                                                         | 10.5                             | 26.5            | 17                    | 13054     |                       |           |
|                                                                                     |                                                                                    | 8/6                                                                                 | G ¼                                                                         | 8                                | 24              | 13                    | 12496     |                       |           |
|                                                                                     |                                                                                    |                                                                                     | G ¼                                                                         | 10.5                             | 26.5            | 17                    | 12497     |                       |           |
|                                                                                     |                                                                                    |                                                                                     | G ¾                                                                         | 11.5                             | 27.5            | 19                    | 12498     |                       |           |
|                                                                                     |                                                                                    |                                                                                     | G ½                                                                         | 15                               | 31.5            | 24                    | 12495     |                       |           |
|                                                                                     |                                                                                    | 10/8                                                                                | G ¼                                                                         | 10.5                             | 28              | 17                    | 13812     |                       |           |
|                                                                                     |                                                                                    |                                                                                     | G ½                                                                         | 15                               | 33              | 24                    | 13056     |                       |           |
|  | <b>Elbow male adapter 90° rotary</b><br>– cylindrical –<br><b>Nickel-plated</b>    | For hose male/female thread Ø mm                                                    | Male thread mm                                                              | Thread length mm                 |                 | Width across flats mm | Order no. |                       |           |
|                                                                                     |                                                                                    | 6/4                                                                                 | G ¼                                                                         | 6                                |                 | 13                    | 13062     |                       |           |
|                                                                                     |                                                                                    |                                                                                     | G ¼                                                                         | 8                                |                 | 17                    | 13063     |                       |           |
|                                                                                     |                                                                                    | 8/6                                                                                 | G ¼                                                                         | 6                                |                 | 13                    | 13064     |                       |           |
|                                                                                     |                                                                                    |                                                                                     | G ¼                                                                         | 8                                |                 | 17                    | 13065     |                       |           |
|                                                                                     |                                                                                    | 10/8                                                                                | G ¼                                                                         | 8                                |                 | 17                    | 13066     |                       |           |
|                                                                                     |                                                                                    |  | <b>Elbow male adapter 90° rotary</b><br>– conical –<br><b>Nickel-plated</b> | For hose male/female thread Ø mm | Male thread mm  | Thread length mm      |           | Width across flats mm | Order no. |
|                                                                                     |                                                                                    |                                                                                     |                                                                             | 6/4                              | R ¼             | 7.5                   |           | 13                    | 13069     |
|                                                                                     |                                                                                    |                                                                                     |                                                                             |                                  | R ¼             | 11                    |           | 14                    | 13070     |
| 8/6                                                                                 | R ¼                                                                                |                                                                                     |                                                                             | 7.5                              |                 | 13                    | 13067     |                       |           |
|                                                                                     | R ¼                                                                                |                                                                                     |                                                                             | 11                               |                 | 14                    | 13068     |                       |           |
| 10/8                                                                                | R ¼                                                                                |                                                                                     |                                                                             | 11                               |                 | 14                    | 13071     |                       |           |

**The optimal solution for lubricating lines.**

Ideally, the lubricator is directly mounted on the lubricating adapter.  
However, this is often not possible depending on the clearance between the lubrication point and the immediate surroundings.  
In this case a line is run from lubricator to lubrication point.

Let us help you find the right connection.



|                                                                                     |                                                                          |                                  |                      |                  |  |                       |                              |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------|----------------------------------|----------------------|------------------|--|-----------------------|------------------------------|
|    | <b>Elbow female adapter 90° rotary</b><br>–cylindrical–<br>Nickel-plated | For hose male/female thread Ø mm | Female thread mm     | Thread length mm |  | Width across flats mm | <b>Order no.</b>             |
|                                                                                     |                                                                          | 6/4                              | G ¼<br>G ¼           | 8<br>10.5        |  | 10<br>13              | <b>13051</b><br><b>13053</b> |
|                                                                                     |                                                                          | 8/6                              | G ¼<br>G ¼           | 8<br>10.5        |  | 10<br>13              | <b>13050</b><br><b>12494</b> |
|                                                                                     |                                                                          | 10/8                             | G ¼                  | 10.5             |  | 13                    | <b>13052</b>                 |
|  | <b>Male T - adapter rotary</b><br>–cylindrical–<br>Nickel-plated         | For hose male/female thread Ø mm | Male thread mm       | Thread length mm |  | Width across flats mm | <b>Order no.</b>             |
|                                                                                     |                                                                          | 6/4                              | G ¼<br>G ¼           | 6<br>8           |  | 13<br>17              | <b>13687</b><br><b>13688</b> |
|                                                                                     |                                                                          | 8/6                              | G ¼<br>G ¼           | 6<br>8           |  | 13<br>17              | <b>13690</b><br><b>13689</b> |
|  | <b>Male T - adapter rotary</b><br>–conical–<br>Nickel-plated             | For hose male/female thread Ø mm | Male thread mm       | Thread length mm |  | Width across flats mm | <b>Order no.</b>             |
|                                                                                     |                                                                          | 6/4                              | R ¼<br>R ¼           | 7.5<br>11        |  | 13<br>14              | <b>13701</b><br><b>13700</b> |
|                                                                                     |                                                                          | 8/6                              | R ¼<br>R ¼           | 7.5<br>11        |  | 13<br>14              | <b>13699</b><br><b>13698</b> |
|  | <b>T - adapter for hose</b><br>Nickel-plated                             | For hose outlet                  | For hose inlet       |                  |  | Width across flats mm | <b>Order no.</b>             |
|                                                                                     |                                                                          | 6/4                              | 6/4                  |                  |  | 8                     | <b>13090</b>                 |
|                                                                                     |                                                                          | 8/6                              | 6/4<br>8/6           |                  |  | 8<br>8                | <b>14068</b><br><b>12511</b> |
|  | <b>Cap nut with flexible, protective spring</b><br>Nickel-plated         | For hose male/female thread Ø mm | Connection thread mm | Thread length mm |  | Width across flats mm | <b>Order No.</b>             |
|                                                                                     |                                                                          | 6/4                              | M 10 x 1             | 96               |  | 12                    | <b>13702</b>                 |
|                                                                                     |                                                                          | 8/6                              | M 12 x 1             | 97               |  | 14                    | <b>13703</b>                 |
| <b>More fittings on the following pages</b>                                         |                                                                          |                                  |                      |                  |  |                       |                              |